

**6**

## C-ONE PLUS

### Technical Data

|                  |         |
|------------------|---------|
| Height           | 2466 mm |
| Width            | 1500 mm |
| Length           | 2660 mm |
| Turntable height | 74 mm   |
| Weight           | 460 kg  |
| Power supply     | 230 VAC |
| Power absorption | 1.5 kW  |

**PLC Controlled**  
**Operator Panel**  
**Sturdiness**



### C-One Plus


**A semi-automatic, exceptionally sturdy and versatile model controlled by a PLC which allows virtually countless customization possibilities.**

It is equipped with an inverter for the turntable and a photocell to detect the pallet height. It is possible to adjust separately the ascent and descent speed of the carriage.

Parameters and cycles are easy to set, thanks to the user-friendly operator panel.

The standard model features all these characteristics, so C-One Plus is often regarded as the perfect partner for peculiar needs. It is a semi-automatic machine indeed, but a luxury one!


# 6 C-ONE PLUS *Semi-Automatic*

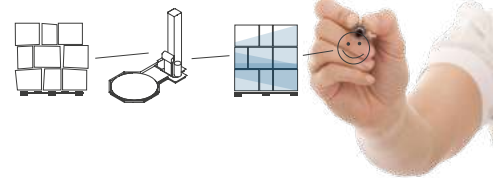

## Product Specifications

- > PLC for the management of the cycle
- > Frequency controller for carriage speed adjustment
- > Frequency controller for turntable speed adjustment
- > Loading plate Ø 1500 mm
- > Maximum height of pallet: 2200 mm
- > Maximum size of the pallet: 800x1200 mm
- > Maximum loading weight: 1200 kg
- > Electromagnetic brake for the stretching of the film
- > Photocell for pallet height detection
- > Safety stop at the base of the carriage
- > Stop at 0 position
- > Power board IP54
- > Lock password (parameters values can be modified only entering a password)
- > Adjustable parameters by the control panel: cycle selection, bottom laps, top laps, topsheet cycle parameters, rotation speed, carriage ascent speed, carriage descent speed, film tension
- > 4 working cycles: ascent/descent; topsheet; only ascent; layers
- > Storage of 10 end user programs
- > 3 working ways: semimanual, semiautomatic, fixed height
- > Strengthening operation
- > Acoustic warning at the cycle start and stop
- > Autodiagnostic
- > Wrapped pallet counter
- > Powder coating
- > Braked turntable at the end of the cycle
- > 2 years warranty

Auto  
Cut-Off



User Friendly  
Operator Panel



## Main Options

Top-press  
Power pre-stretch  
Adjustable power pre-stretch  
Power pre-stretch with auto cut-off system  
Roping system  
3000 mm max wrapping height  
1650 mm turntable  
1800 mm turntable  
2000 kg max pallet weight  
Remote control  
Ramp

Pit frame  
Photocell for dark loads  
Clip to tie the film to the turntable  
Weighing system  
Mechanical system to brake roll containers  
Feet under the machine  
Safety fences  
GSM module

Up To Ø 3400 mm  
Turntable

