

7

C-ONE SUPERPLUS

**Automatic Cut & Seal
Device To Eliminate
The “Film Tail”
“Don’t Get Off” System**



Technical Data

Height	2473 mm
Width	1650 mm
Length	2804 mm
Turntable height	80 mm
Weight	600 kg
Power supply	230 VAC
Power absorption	2 kW


C-One Superplus

In C-One Division there is a synergy of design ability and extensive experience around wrapping machines business.

C-One Superplus is a fully automatic low profile turntable machine, with four original solutions: automatic film clamping system; automatic film cutting; film sealing system; “tail” elimination device.

Along with an infrared/radio remote control, these four systems allow the operator to be free from all manual work, increasing safety, improving packaging quality and saving time. Automatic, practical, robust, simple: C-One Superplus is the right solution even for the most demanding customers.


7 C-ONE SUPERPLUS *Semi-Automatic*

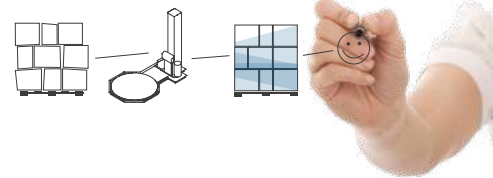

Product Specifications

- > Automatic cycle for film hooking, pallet wrapping, film cold cutting and film hot sealing
- > Air device to blow up the film tail
- > Power pre-stretch carriage
- > Electronic printed circuit board for the management of the cycle
- > Frequency controller for carriage speed adjustment
- > Frequency controller for turntable speed adjustment
- > Loading plate ø 1650 mm
- > Maximum height of pallet: 2200 mm
- > Maximum size of the pallet: 800x1200 mm
- > Maximum loading weight: 2000 kg
- > Photocell for pallet height detection
- > Safety stop at the base of the carriage
- > Stop at 0 position
- > Power board IP54
- > 3 password levels (including lock password)
- > Adjustable parameters by the control panel without password: cycle selection, bottom laps, top laps, topsheet cycle parameters, rotation speed, carriage ascent speed, carriage descent speed, film tension, starting wrapping height
- > Quick selection of 6 main parameters or saved programs
- > USB port to upload software and download settings and reports
- > Statistics
- > 3 working cycles: ascent/descent; topsheet; layers
- > Storage of 32 end user programs
- > 3 working ways: semimanual, semiautomatic, fixed height
- > Strengthening operation
- > Acoustic warning at the cycle beginning and stop
- > Autodiagnostic
- > Wrapped pallet counter
- > Powder coating
- > Braked turntable at the end of the cycle

Sealing Unit



Control Panel



Main Options

Top-press
Adjustable power pre-stretch
3000 mm max wrapping height
1800 mm turntable
2000 kg max pallet weight
Remote control
Ramp
Pit frame

Photocell for dark loads
Weighing system
Mechanical system to brake roll containers
Feet under the machine
Safety fences

Pps Carriage With Roping System

